09773531

United States Patent [19]

Nagano

[11] **Patent Number:** **5,920,408**

[45] **Date of Patent:** **Jul. 6, 1999**

US005920408A

[54] **COLOR IMAGE READER**

[75] Inventor: **Fumikazu Nagano**, Yamato-Koriyama, Japan

[73] Assignee: **Sharp Kabushiki Kaisha**, Osaka, Japan

[21] Appl. No.: **08/775,997**

[22] Filed: **Jan. 3, 1997**

[30] **Foreign Application Priority Data**

Jan. 18, 1996 [JP] Japan 8-006629

[51] **Int. Cl.⁶** H04N 1/46; H04N 1/40; H01R 33/00

[52] **U.S. Cl.** 358/509; 358/509; 358/471; 358/516; 362/226

[58] **Field of Search** 358/509, 471, 358/516; 348/223; 362/226

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,642,679	2/1987	Nagano	358/75
4,670,779	6/1987	Nagano	358/75
4,731,661	3/1988	Nagano	358/75
5,450,215	9/1995	Iwama	358/509

FOREIGN PATENT DOCUMENTS

0158332A2	4/1985	European Pat. Off. .	
257392	12/1990	Japan .	
334712	5/1991	Japan .	

Primary Examiner—Edward L. Coles
Assistant Examiner—Twyler Lamb
Attorney, Agent, or Firm—David G. Conlin; William J. Daley, Jr.

[57] **ABSTRACT**

A compact color image reader for scanning an image in a short time is disclosed. The color image reader includes three fluorescent lamps 17 of red, green, and blue, a lighting circuit 15 for lighting the three fluorescent lamps sequentially, a CCD 183 for reading an image illuminated by the three fluorescent lamps and a control circuit 16 for controlling a lighting period of each of the fluorescent lamps 17 and the reading of the CCD. In order to perform the scanning of a color image in a short time, the lighting circuit 15 lights each of the three fluorescent lamps at a lamp current higher than a rated value and the CCD performs the fast reading in a period corresponding to the lighting period.
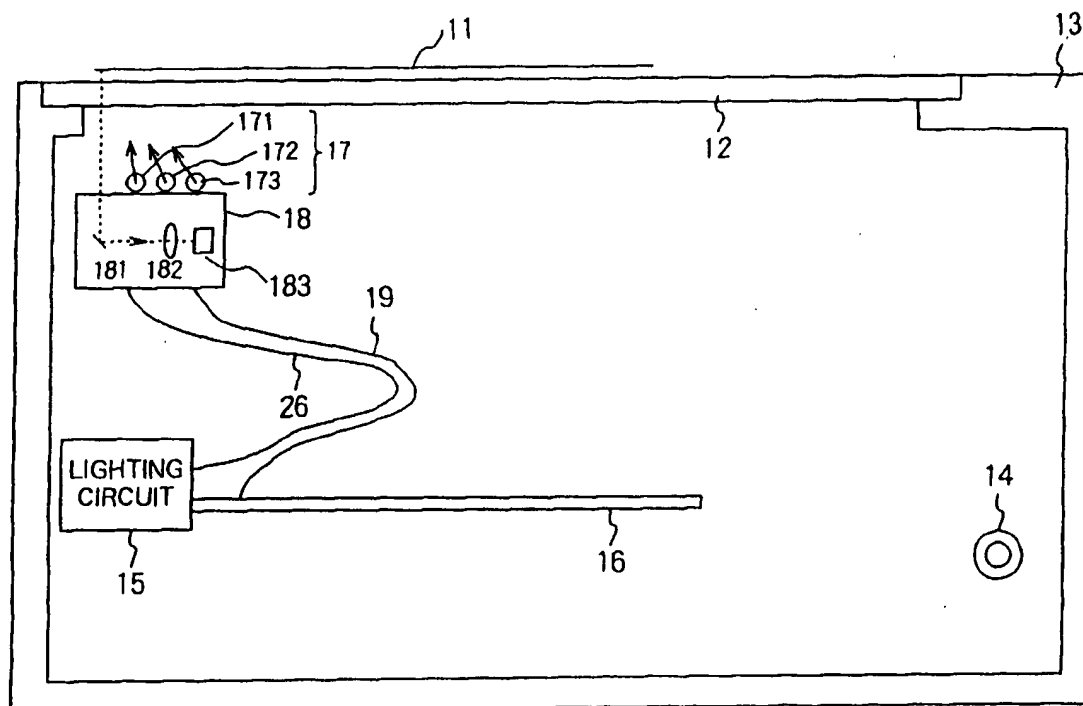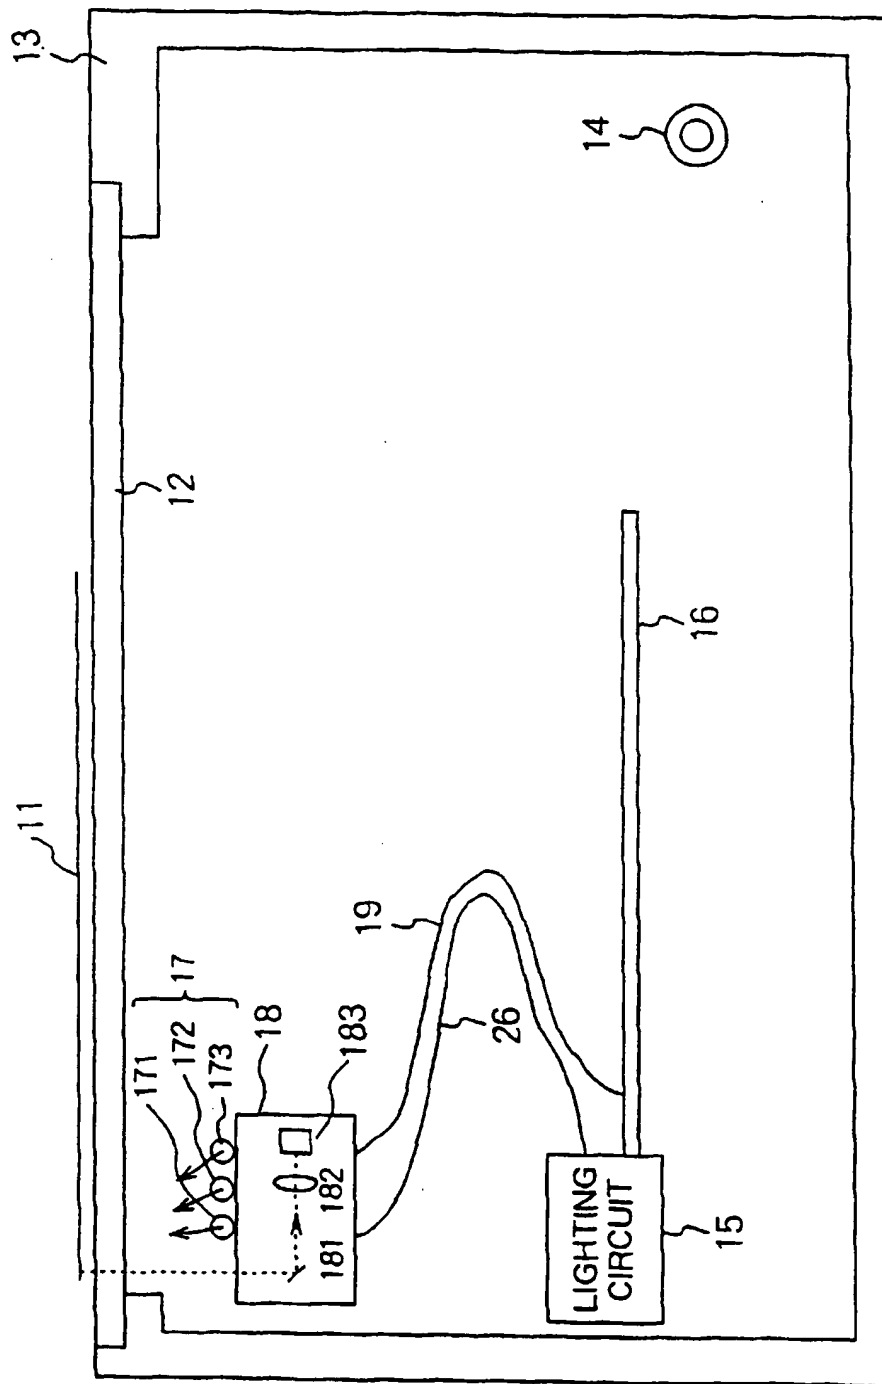
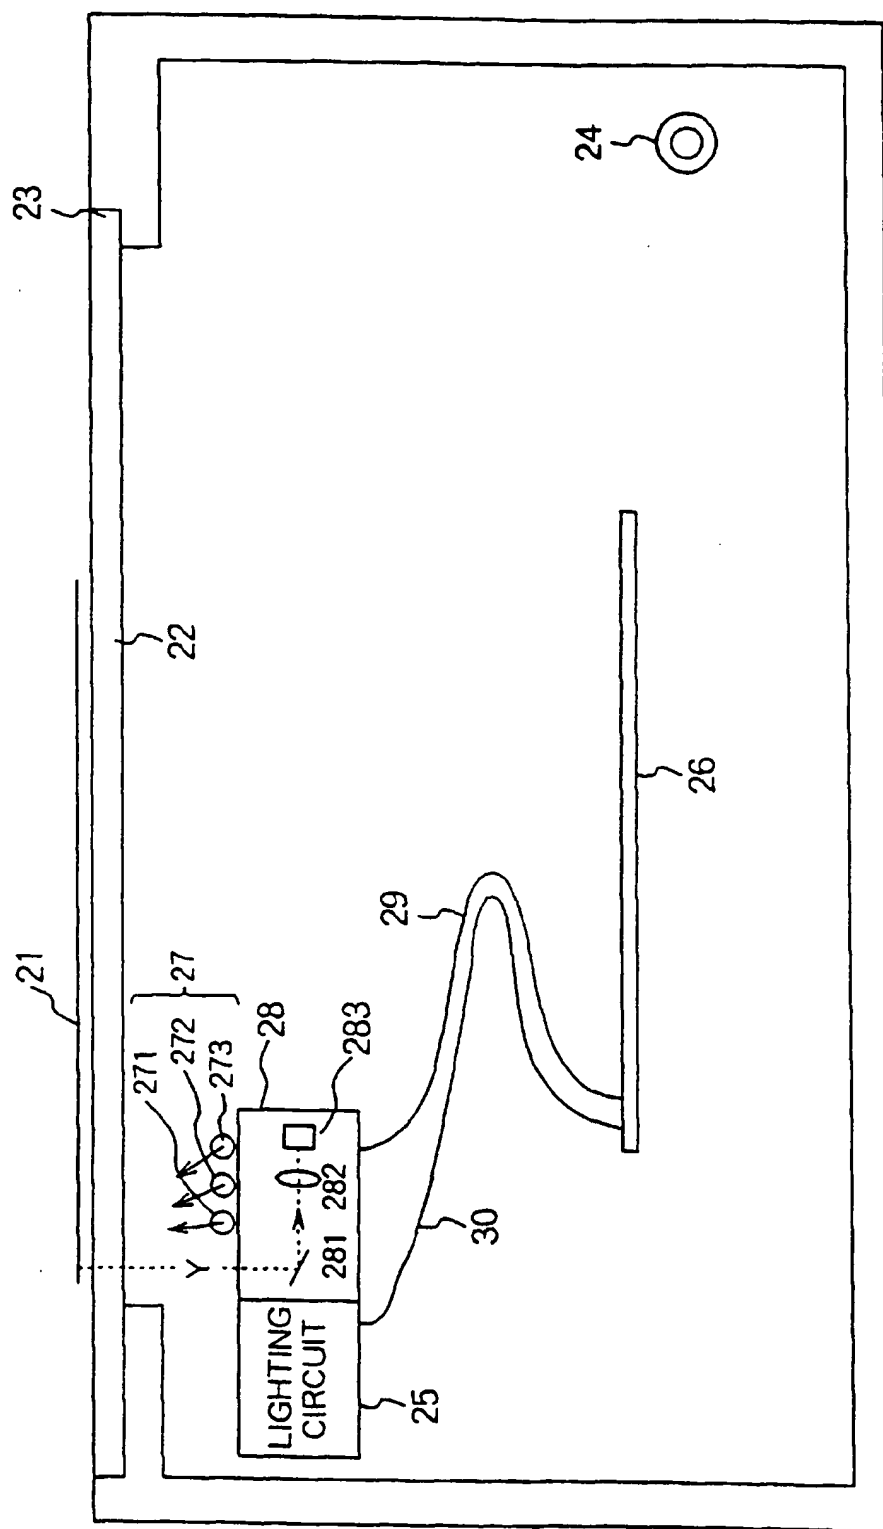**8 Claims, 13 Drawing Sheets**
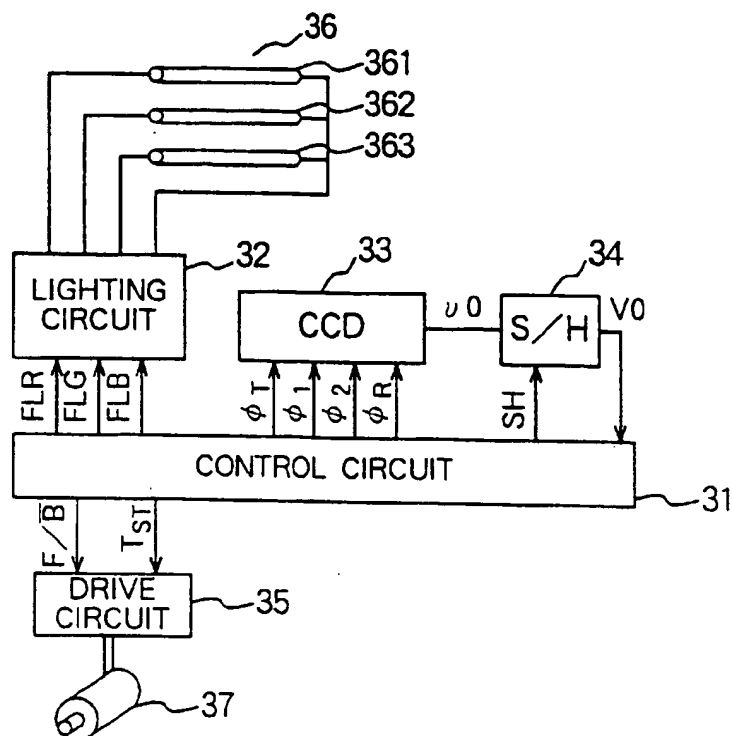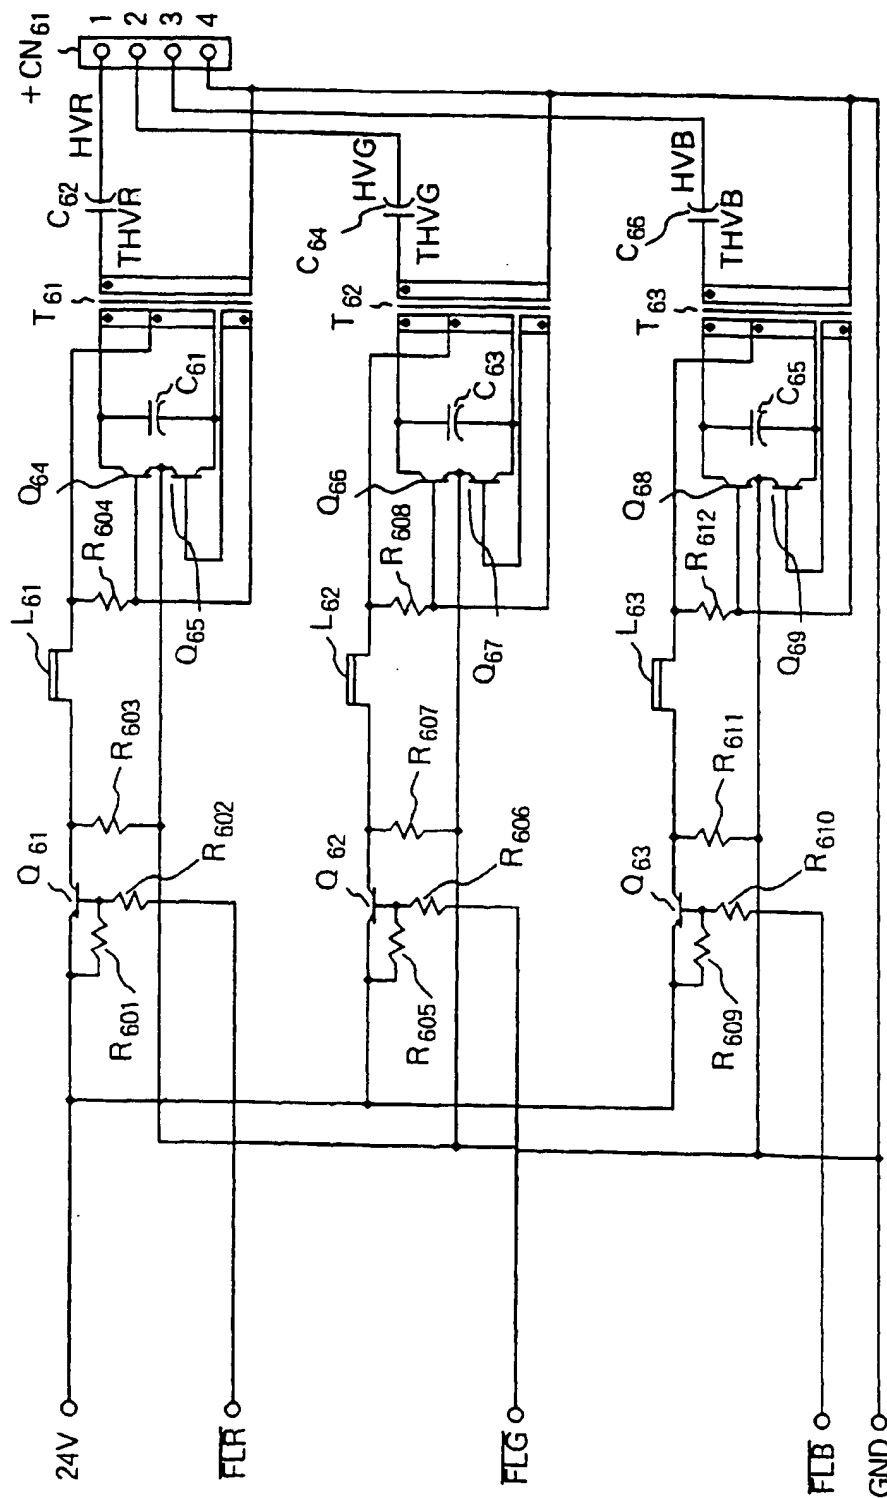
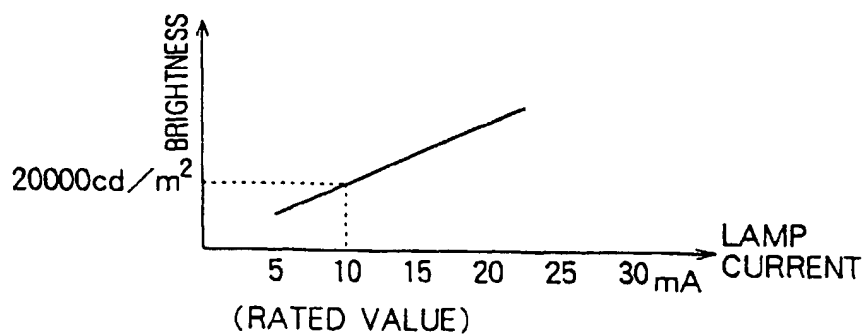# FIG. 1
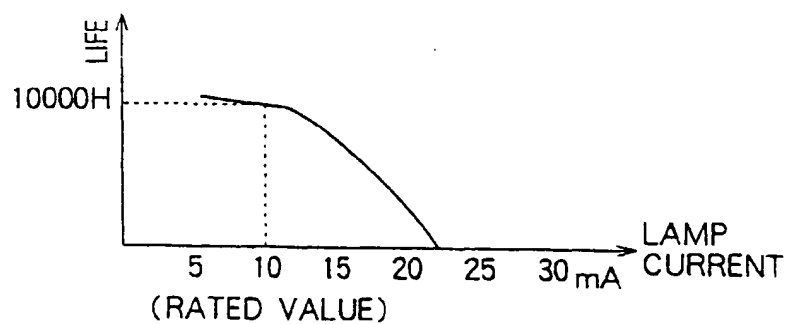
FIG. 2

FIG. 3

FIG. 4

TIME
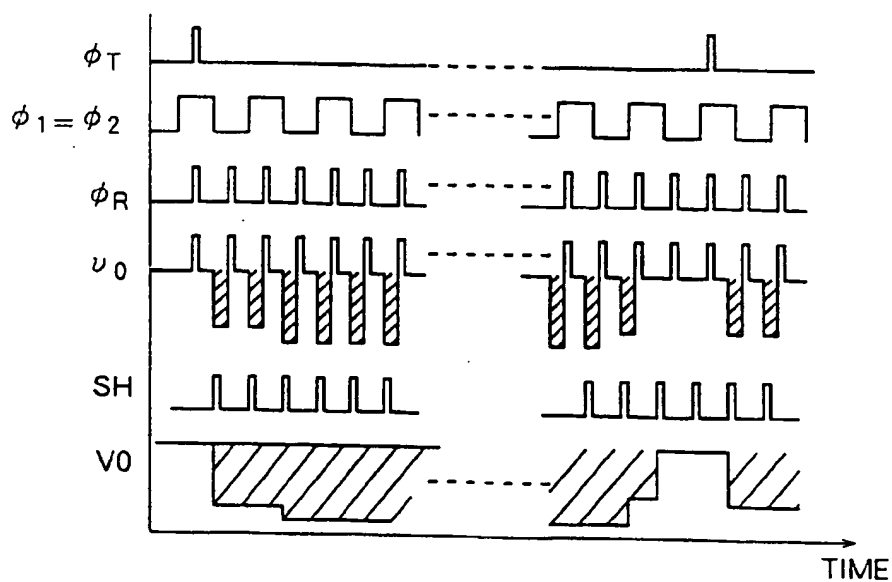
FIG. 5
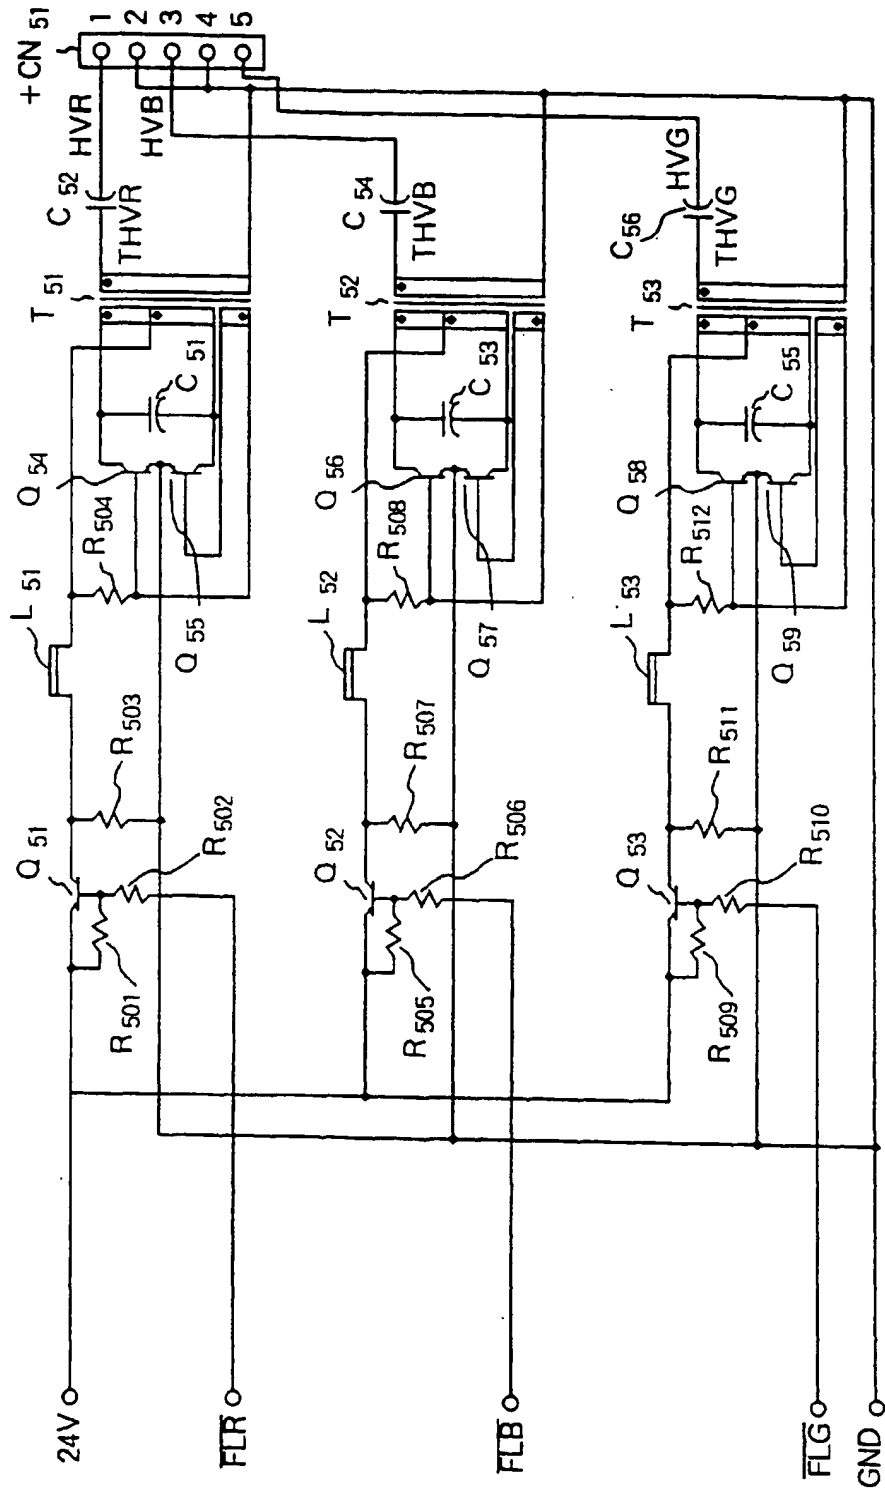
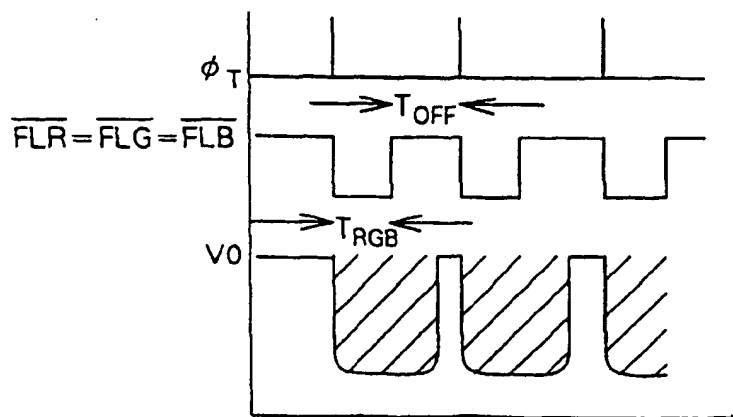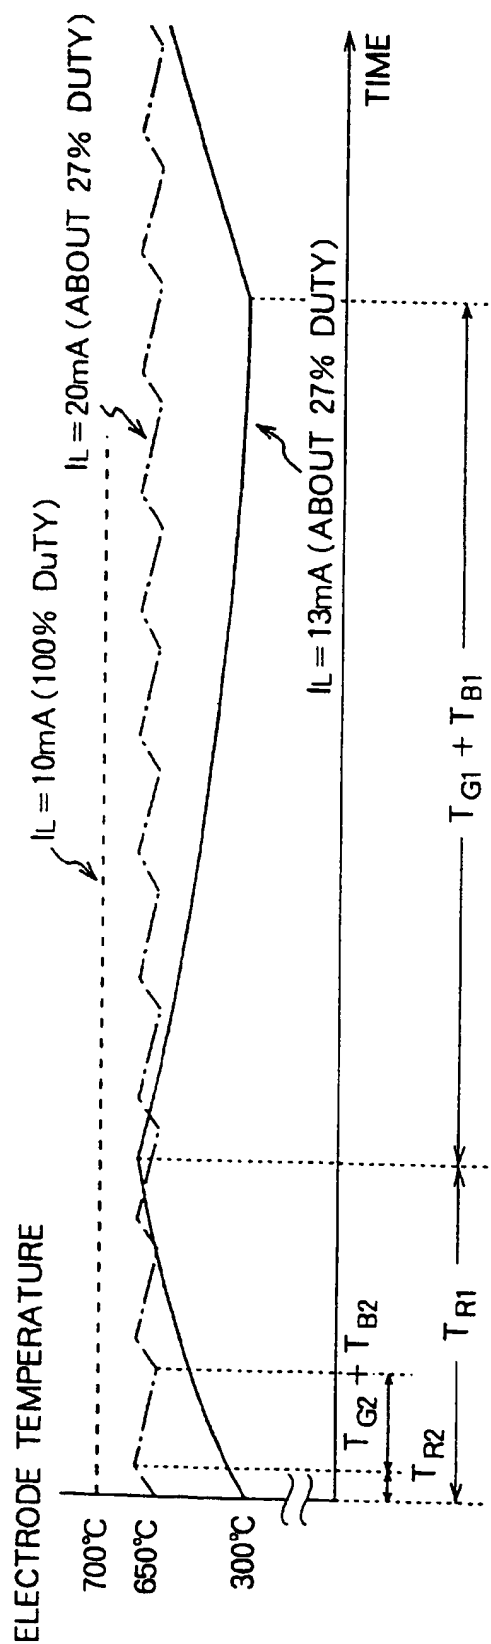# FIG. 6

FIG. 7a

FIG. 7b

FIG. 7c
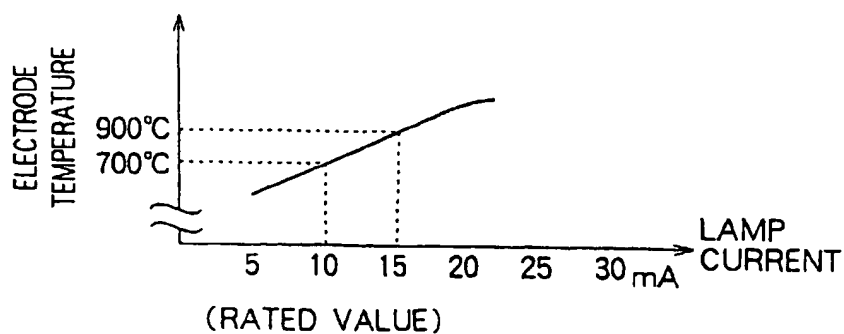
FIG. 8
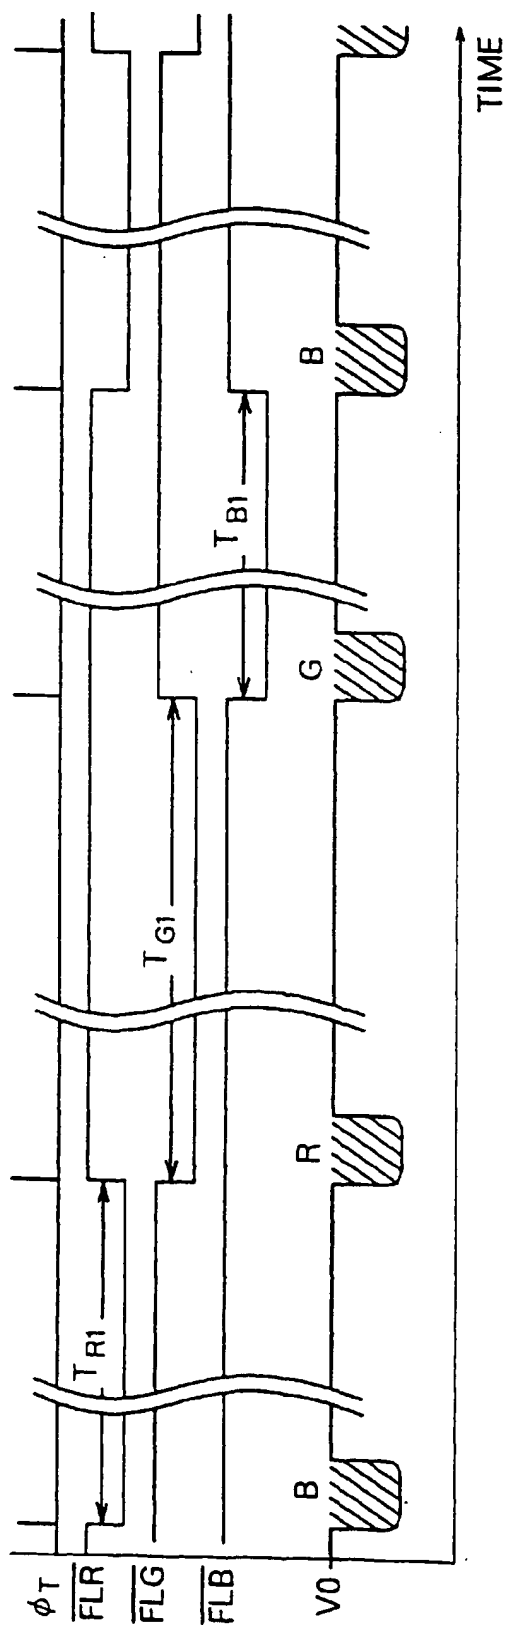
FIG. 9a
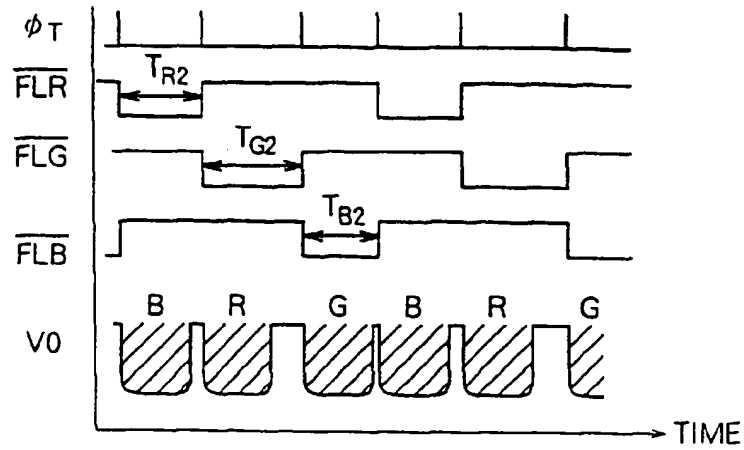
FIG. 9b
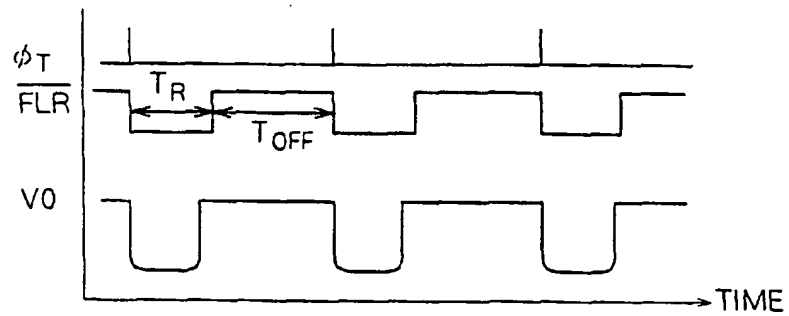
FIG. 9c

FIG. 10

FIG. 11

FIG. 12

FIG. 13

FIG. 14

T_{52} C_{54}

HVB

THVB

C_{122} C_{123} R_{FL}

FIG. 15

ELECTRODE
TEMPERATURE

720℃
700℃

$T_{G2} + T_{R2} + T_{B2} = 4.41/2 = 2.205msec$

$T_{G2} + T_{R2} + T_{B2} = 4.41msec$

TIME

T_{G2}
1.74msec

$T_{R2} + T_{B2}$
2.67msec

1
2
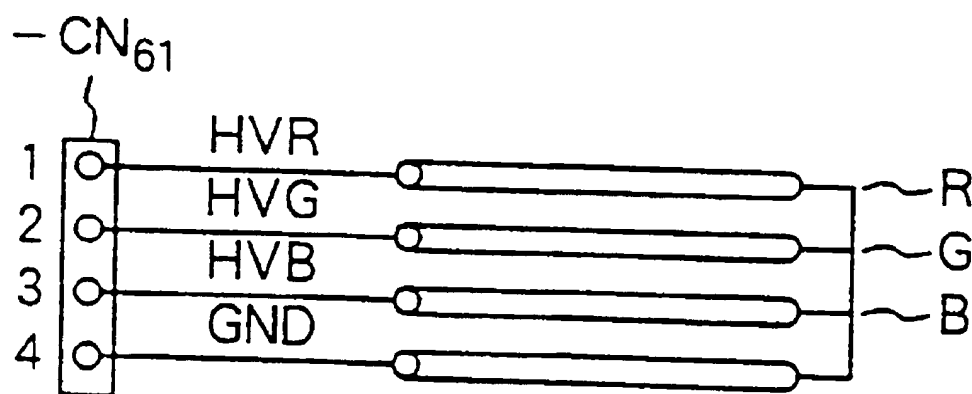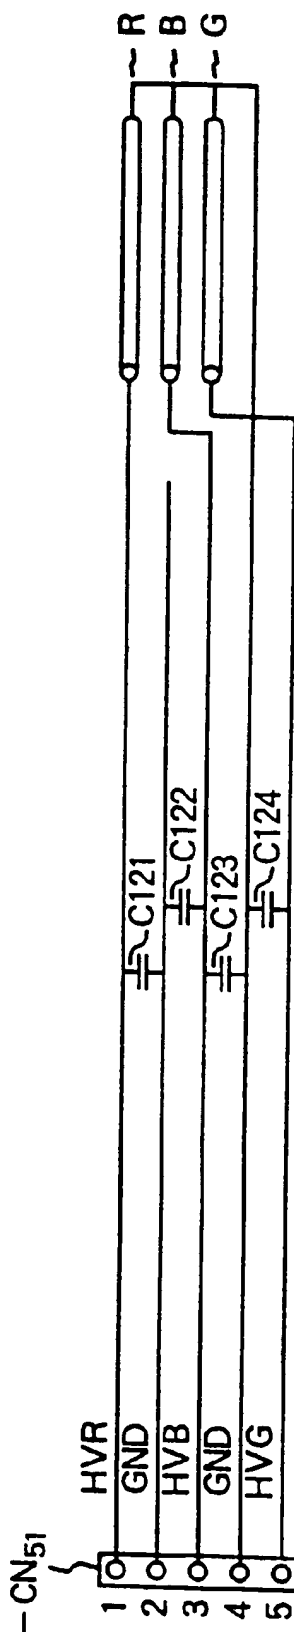
COLOR IMAGE READER

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a color image reader, and in particular, to a color scanner or a color facsimile.

2. Description of the Related Art

Conventional light sources for scanners include hot cathode fluorescent lamps each having a filament section at both ends. An advantage of hot cathode fluorescent lamps is their large luminous energy but they are disadvantageous in that they have a large lamp diameter of 100 mmf and a short life of about 5,000 H. Japanese Patent Application Laying Open (KOKAI) No. 2-57392 discloses a lighting circuit for hot cathode fluorescent lamps.
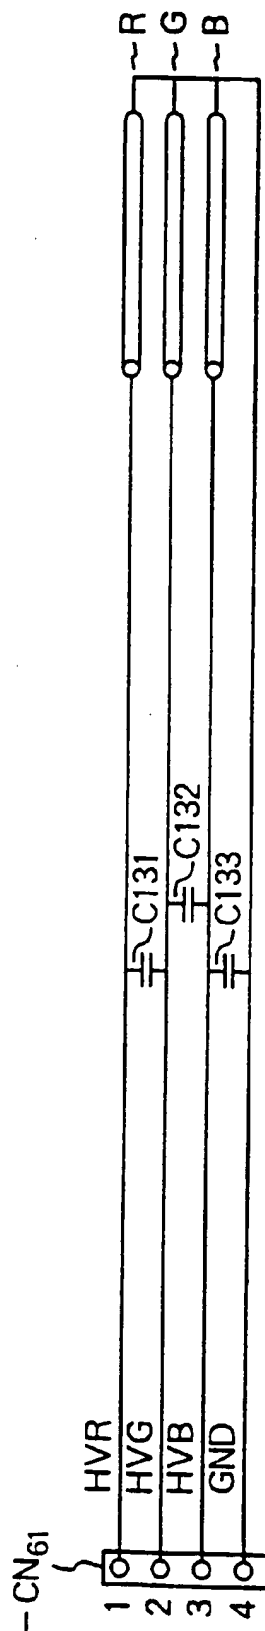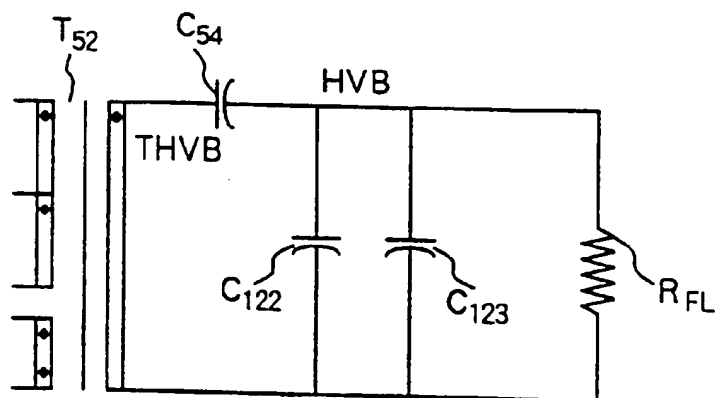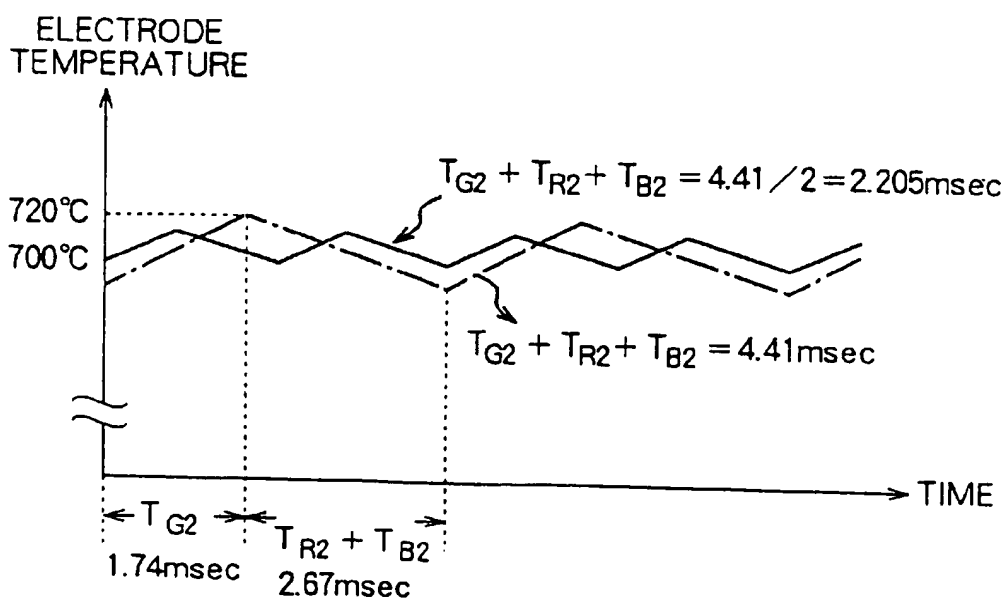
Japanese Patent Application Laying Open (KOKAI) No. 3-34712 discloses a color image reader that allows three light sources to flash sequentially at a high speed and which uses a CCD.

By using three circuits as shown in Japanese Patent Application Laying Open (KOKAI) No. 2-57392, three hot cathode fluorescent lamps can be allowed to light easily.

Small cold cathode fluorescent lamps having diameter of 4 or 3 mint with no filament section at either end have recently been implemented. The sensitivity of CCDs has also recently been improved to enable much faster reading.

Although cold cathode fluorescent lamps are smaller than hot cathode fluorescent lamps and have a longer life (about 10,000 H), they disadvantageously have a smaller luminous energy and requires a high voltage of 1,200 VAC compared to 300 VAC in h hot cathode fluorescent lamps.

Thus, the use of a cold cathode fluorescent lamp enables a small scanner to be implemented but results in a lower reading speed.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a color image reader that can provide fast scanning and have a small size even if a cold cathode fluorescent lamp is used therein.

According to the present invention, the above object is achieved by a color image reader comprising three fluorescent lamps each for radiating respective one of lights having wavelengths of red, green, and blue, a lighting circuit for lighting the fluorescent lamps with respective lamp currents each having a value higher than a rated current of each of the fluorescent lamps, a CCD for reading an image illuminated by the fluorescent lamps and a control circuit for controlling a lighting period of each of the fluorescent lamps and a reading period of the CCD.

The color image reader increases the luminous energy of each fluorescent lamp to enable fast reading operations.

The control circuit may turn off each of the fluorescent lamps for a predetermined period of time within a lighting period therefore, so as to make the average lamp current equal to or lower than a rated value of the fluorescent lamp, when the three fluorescent lamps are turned on sequentially.

The color image reader enables fast reading operations without increasing the electrode temperature when a single fluorescent lamp is used to read images.

The control circuit may turn off the three fluorescent lamps simultaneously for a predetermined period of time so as to make each of the average lamp currents equal to or lower than respective ones of rated values, when the three fluorescent lamps are turned on simultaneously.

The color image reader enables fast reading operations without increasing the electrode temperature when three fluorescent lamps are allowed to light simultaneously in order to perform reading operations.

Preferably, the predetermined period of time is determined to be longer than a time period T_{OFF} for satisfying the following expression,

$$I_R = (I_{ON} \times T_{ON})/(T_{ON} + T_{OFF}),$$

where T_{ON} is a time period for turning on, I_R is a rated current, and I_{ON} is a current from the lighting circuit.

The color image reader enables the easy setting of that ON/OFF period of time of fluorescent lamps which maintains the electrode temperature at the appropriate value or lower.

Preferably, the color image reader further comprises a set of cables for connecting the three fluorescent lamps with the lighting circuit, including three high voltage lighting lines each corresponding respective one of the fluorescent lamps and two GND lines each located between the two high voltage lighting lines.

The color image reader can reduce the effects of the floating capacity between high voltage lighting cables on each fluorescent lamp.

More preferably, the high voltage lighting line located in the middle of the three high voltage lighting lines is connected to o ne of the three fluorescent lamps which has the highest luminous efficacy.

The color image reader can reduce the difference in the electrode temperature among three fluorescent lamps when the floating capacity between high voltage lighting cables affect each fluorescent lamp.

More preferably, the capacity of a high voltage capacitor in the lighting circuit which corresponds to each fluorescent lamp is twice or greater than the floating capacity in the high voltage line connected thereto.

The color image reader can reduce the voltage to be generated in transformers and enables the use of small and inexpensive transformers when the floating capacity between high voltage lighting cables affect each fluorescent lamp.

Further objects and advantages of the present invention will be apparent from the following description of the preferred embodiment of the invention as illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows construction of a first embodiment of the color image reader according to the present invention;

FIG. 2 shows construction of a second embodiment of the color image reader according to the present invention;

FIG. 3 is a block diagram of a circuit used for the readers in FIGS. 1 and 2;

FIG. 4 is a timing chart showing the relationship between clock signals from a control circuit and an output signal from a CCD;

FIG. 5 is a circuit diagram showing a first specific example of a lighting circuit;

FIG. 6 is a circuit diagram showing a second specific example of a lighting circuit;

each of FIGS. 7a to 7c is a graph showing changes in each parameter relative to changes in the lamp current of a cold cathode fluorescent lamp rated at 10 mA;

FIG. 8 is a timing chart showing the relationship between a lighting period and a CCD output in a conventional CCD when three light sources are allowed to light sequentially;

electrodes at an appropriate temperature or lower in order to ensure a longer life of the lamps.

FIG. 9c shows the relationship between the lighting signal and V0 when the three light sources (R, G, and B) were allowed to light simultaneously and when the lamp current was set at 20 mA. In this case also, the period of time T_{OFF} is provided for turning off lighting.

FIG. 10 is a graph showing the relationship between the lamp current and the electrode temperature. The three lines in this figure indicate the case in which the lamp current I_L was maintained at 10 mA and in which the lamps were allowed to light constantly (100% DUTY), the case in which the lamp current I_L was maintained at 13 mA and in which the ON period of time T_{R1} lasted 15 msec. while the OFF period time $T_{G1}+T_{B1}$ lasted about 40 msec so that the light sources were turned on and off at 27% DUTY, and the case in which the lamp current I_L was 20 mA and in which the light sources were turned on and off at 27% DUTY.

As is apparent from the graph, when I_L=10 mA and the lamps were allowed to light constantly, the electrode temperature was 700° C., whereas when I_L=13 mA and the light sources were turned on and off at 27% DUTY, the peak of the electrode temperature was about 650° C., which is lower than the appropriate temperature of 700° C.

It will be understood that when DUTY lighting is carried out, there is no problem even if the current applied while the lamps are turned on is lower than the rated value. That is, flashing at I_L=13 mA improves the reading speed compared to flashing at I_L=10 mA. Since 10/13 is about 0.77, the reading time can be reduced to about 77%.

This relationship can be described as follows using equations.

In FIGS. 8 and 10, if I_L=13 mA and it is assumed that

T_{R1}=15 msec.,

T_{G1}=18.75 msec., and

T_{B1}=13.75 msec., then

$T_{R1}+T_{G1}+T_{B1}$=47.5 msec.

If I_L=10 mA and it is assumed that

T_{R1}=19.5 msec.,

T_{G1}=24.38 msec., and

T_{B1}=17.88 msec., then

$T_{R1}+T_{G1}+T_{B1}$=61.76 msec.

The reading time ratio is 47.5/61.76=about 0.77.

The above relationship can also be estimated easily from the fact that the integral time of the image sensor (T_{R1}, T_{G1}, T_{B1}) is inversely proportional to each lamp current due to the linear relationship between the brightness of the fluorescent lamp and the lamp current shown in FIG. 7a.

In addition, since recent CCD are very sensitive, the case will be discussed in which such a high-sensitivity CCD is used and in which fluorescent lamps are allowed to light at 20 mA, which is double the rated value, and at 27% DUTY.

In this case, T_{R2} shown in FIG. 10 is about one-seventh of T_{R1} obtained when a low-sensitivity CCD is used and when lamps are allowed to light at I_L=13 mA because the sensitivity of the new CCD is seven times as large as that of the low-sensitivity CCD. The lamp current increases from 13 mA to 20 mA. Thus, compared to 15 msec. in the old CCD, the reading time is reduced to

15 msec.×(1/7)×(13/20)=about 1.4 msec.

It is well known that the output of the CCD is proportional to the brightness of light received by the CCD as well as the integral time (between $\emptyset_T$ and $\emptyset_T$). Thus, if a specified value

of CCD output is expected, the integral time is inversely proportional to the sensitivity of the CCD and the strength of light received by the CCD.

FIG. 10 also indicates that the peak of the electrode temperature is maintained at the appropriate value or lower when the fluorescent lamps are turned on and off at a short interval even if the ON DUTY remains the same and even if a large amount of lamp current is allowed to flow.

This is because when the fluorescent lamps are turned on and off at a short interval, the average temperature of the electrode increases and becomes higher than the ambient temperature to provide good heat radiation.

The scanning time can be reduced by increasing the sensitivity of the CCD in this manner, but this invention can further reduce the scanning time for color reading by significantly increasing the lamp current relative to the rated value.

The method for allowing the sequential flashing of the three fluorescent lamps corresponding to the primary colors has been described. If, however, a single color light is used but the T_{OFF} period of time is not provided as shown in FIG. 9b, the fluorescent lamps are allowed to light at a lamp current of 20 mA and at 100% DUTY to significantly increase the temperature of the electrode section, thereby substantially reducing their life. Consequently, the provision of the T_{OFF} period of time serves to maintain the average lamp current at the rated value or lower to ensure a longer life of the lamps.

If the three fluorescent lamps are allowed to light simultaneously for scanning, the provision of the T_{OFF} period of time ensures a longer life of the lamps as in the single primary color.

If a single color light is used or three color lights are simultaneously radiated as described above, the OFF period of time T_{OFF} during which the average lamp current is maintained at the rated value can be determined by the following equation if the ON period of time of the fluorescent lamps is referred to as T_{ON}.

The rated current of the fluorescent lamp=(the lamp current in ON period×T_{ON})/($T_{ON}+T_{OFF}$).

Thus, T_{OFF} must only be larger than its value that meets the above equation.

If the lamp currents of the three fluorescent lamps have the same value and T_{R2}=1.4 msec., T_{G2}=1.74 msec., and T_{B2}=1.27 msec. in FIG. 9a, the temperature of the electrode of the G fluorescent lamp is the highest among the three fluorescent lamps R, G and B because its ON time=1.74 msec. is the longest while its OFF time=$T_{R2}+T_{B2}$=2.67 msec. is the shortest.

The upper limit of the lamp current of the G lamp is then determined.

If in FIG. 15, T_{R2}=1.4 msec., T_{G2}=1.74 msec., and T_{B2}=1.27 msec. as in FIGS. 9a to 9c, the maximum temperature of the electrode is 720° C., which is close to the appropriate temperature of 700° C. Thus, this construction does not affect the life of the fluorescent lamp.

FIG. 15 also includes a graph indicating the case in which T_{R2}=1.4 msec./2, T_{G2}=1.74 msec./2, and T_{B2}=1.27 msec./2. In this case, both the maximum and the minimum temperatures of the electrode are about 700° C., so the life of the fluorescent lamp is not affected.

Furthermore, if T_{R2}=1.4 msec./5, T_{G2}=1.74 msec./5, and T_{B2}=1.27 msec./5, the temperature of the electrode is maintained at a constant value of about 700° C.

FIGS. 7b and 7c indicate that the life of the fluorescent lamp is not affected until the temperature of the electrode increases from the appropriate value of 700° C. to reach 750° C.

7

Consequently, when the period of time $(T_{R2}+T_{G2}+T_{B2})$ is short, turning the lamp current on and off is equivalent to the application of the average current at 100% DUTY (direct currents).

That is, when the period of time $(T_{R2}+T_{G2}+T_{B2})$ is short, the rated current of the fluorescent lamp≧the average current=(the lamp current of the fluorescent lamp×T_{OFF})/$(T_{ON}+T_{OFF})$. The life of the fluorescent lamp is not affected if the average current or the rated current of the lamp or lower is used.

Although the embodiments of this invention has been described, this aspect is applicable to not only cold cathode fluorescent lamps but also hot cathode fluorescent lamps.

Wiring cables for the lighting circuit is discussed below.

If in a scanner using a cold cathode fluorescent lamp, the lighting circuit 25 is disposed near the fluorescent lamps as shown in FIG. 2, high voltage lighting cables HVR, HVG, and HVB (to each of which about 1,000 V is applied) shown in FIG. 6 are not adversely affected by the floating capacity due to the small wiring length as shown in FIG. 11. The floating capacity, however, adversely affects the lighting cables if the lighting circuit 15 shown in FIG. 1 is moved from the neighborhood of the light sources and located near the control circuit 16 and if the length of the wiring in FIG. 11 is increased so as to connect the cables to the cold cathode fluorescent lamps as in FIG. 13, the floating capacity adversely affects the lighting cables.

When, for example, a high voltage HVR is applied, due to the high frequency of the HVR (about 40 kHz), the floating capacity C131 causes not only the R cold cathode fluorescent lamp but also the G cold cathode fluorescent lamp to light faintly, resulting in the mixture of colors during color reading.

Thus, according to the embodiments of this invention, when the wiring length becomes longer, the interference among the high voltage lighting cables and thus the mixture of colors can be prevented by arranging the wiring in the order of a high voltage lighting cable, a GND cable, a high voltage lighting cable, and a GND high voltage lighting cable as in the lighting circuit shown in FIG. 5 and the cables shown in FIG. 12.

In FIG. 12, only the floating capacity C_{121}, or C_{124} is connected to the high voltage lighting cable at either end, whereas a combined capacity $C_{122}+C_{123}$ is connected to the high voltage lighting cable in the middle as the floating capacity. In this case, the effective current to the middle cold cathode fluorescent lamp is smaller than that to the fluorescent lamp at either end, while the middle cold cathode fluorescent lamp has a larger reactive current to the floating capacity than the fluorescent lamp at either end. This causes the middle fluorescent lamp to be darker than the fluorescent lamp at either end under the same conditions.

Thus, according to the embodiments of this invention, the cable from the B cold cathode fluorescent lamp that is the lightest among the R, G, and B cold cathode fluorescent lamps is preferably located in the middle in order to balance the R, G, and B light DUTY. If, for example, in FIG. 9a, the cable to the darkest G fluorescent lamp is located in the middle, $T_{R2}=1.5$ msec., $T_{G2}=2.7$ msec., and $T_{B2}=1$ msec. and the ON DUTY of the G light source is about 52%, thereby disadvantageously increasing the temperature of the G light source to reduce the life of only the G light source.

If these cables are arranged as described above, then $T_{R2}=1.5$ msec., $T_{B2}=1.5$ msec., and $T_{G2}=1.8$ msec. to significantly increase the ON DUTY of the G light source up to 38%.

In FIGS. 5 and 12, the lighting circuit for the B cold cathode fluorescent lamp can be represented by the equivalent circuit in FIG. 14. Allowing the lighting of the B cold cathode fluorescent lamp, which is shown by the resistant load R_{FL} in FIG. 14, requires a high voltage expressed by the following equation:

8

$$HVB=C_{54}/(C_{54}+C_{122}+C_{123})\times THV_B$$

Since 1,000 V of HVB is required at minimum, about 2,000 V of THV_B is required if C_{54} is 33 PF and $C_{122}+C_{123}$ is about 30 PF. The transformer T_{52} must thus produce a very high voltage and be large and expensive to provide voltage proof. Consequently, according to this invention, $C_4=68$ PF is used to reduce the required amount of the THV_B down to 1,500 V or lower in order to enable the use of small and inexpensive transformers.

If in the embodiment shown in FIG. 2, the circuit in FIG. 6 and the cables shown in FIG. 11 are used to reduce the wiring length, the flowing capacity is negligible, so there will be no problem if C_{62}, C_{64}, and C_{66}, in FIG. 6 are 20 PF or lower.

Many widely different embodiments of the present invention may be constructed without departing from the spirit and scope of the present invention. It should be understood that the present invention is not limited to the specific embodiment described in the specification, except as defined in the appended claims.

What is claimed is:

1. A color image reader comprising:

three fluorescent lamps each for radiating respective one of lights having wavelengths of red, green and blue;

a lighting circuit for lighting said fluorescent lamps with respective lamp currents each having a value higher than a rated current of each of said fluorescent lamps;

a CCD for reading an image illuminated by said fluorescent lamps;

a control circuit for controlling a lighting period of each of said fluorescent lamps and a reading period of said CCD; and

wherein said reading period of said CCD is reduced in accordance with a ratio of the rated current to the lamp current.

2. A color image reader according to claim 1, wherein said control circuit turns off each of said fluorescent lamps for a predetermined period of time within a lighting period therefore, so as to make the average lamp current equal to or lower than a rated value of the fluorescent lamp, when said three fluorescent lamps are turned on sequentially.

3. A color image reader according to claim 1, wherein said control circuit turns off said three fluorescent lamps simultaneously for a predetermined period of time so as to make each of the average lamp currents equal to or lower than respective ones of rated values, when said three fluorescent lamps are turned on simultaneously.

4. A color image reader according to claim 1, wherein said reader further comprises a set of cables for connecting said three fluorescent lamps with said lighting circuit, including three high voltage lighting lines each corresponding respective one of said fluorescent lamps and two GND lines each located between the two high voltage lighting lines.

5. A color image reader according to claim 2, wherein said predetermined period of time is determined to be longer than a time period T_{OFF} for satisfying the following expression,

$$I_R=(I_{ON}\times T_{ON})/(T_{ON}+T_{OFF}),$$

where T_{ON} is a time period for turning on, I_R is a rated current, and I_{ON} is a current from said lighting circuit.

9

6. A color image reader according to claim **3**, wherein said predetermined period of time is determined to be longer than a time period T_{OFF} for satisfying the following expression,

$$I_R = (I_{ON} \times T_{ON})/(T_{ON} + T_{OFF}),$$

where T_{ON} is a time period for turning on, I_R is a rated current, and I_{ON} is a current from said lighting circuit.

7. A color image reader according to claim **4**, wherein the high voltage lighting line located in the middle of said three

10

high voltage lighting lines is connected to one of said three fluorescent lamps which has the highest luminous efficacy.

8. A color image reader according to claim **4**, wherein the capacity of a high voltage capacitor in said lighting circuit which corresponds to each fluorescent lamp is twice or greater than the floating capacity in the high voltage line connected thereto.

* * * * *